


CSM 800 / 900




YARI OTOMATİK HİDROLİK SÜTUNLU TESTERE TEZGAHI SEMI AUTOMATIC DOUBLE COLUMN HYDRAULIC BANDSAW MACHINE

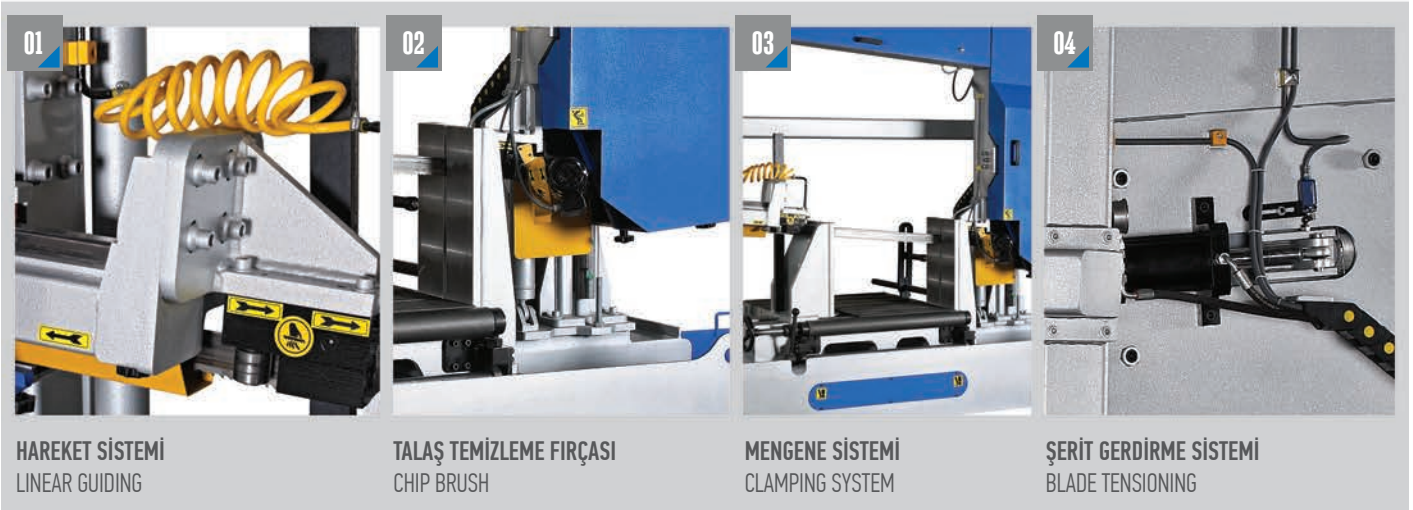

ÖLÇÜLER DIMENSIONS

SÜTUNLU MODELLER DOUBLE COLUMN TYPES

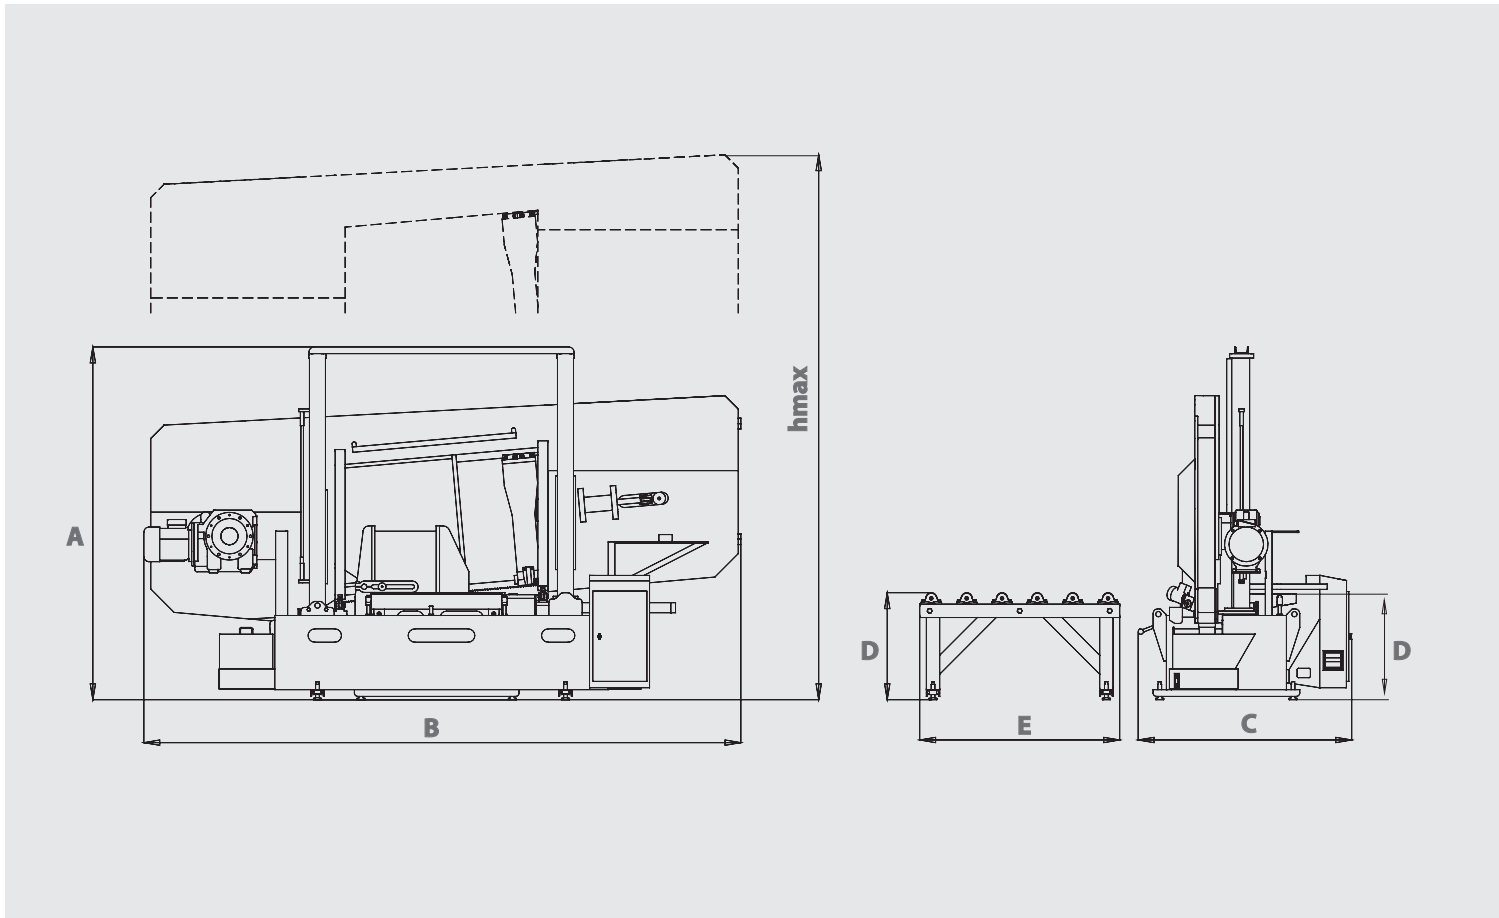

TEKNİK ÖZELLİKLER TECHNICAL FEATURES

A	2440 mm 96.06 inch	B	4406 mm 173.46 inch	C	1570 mm 61.81 inch	D	610 mm 24.02 inch	E	1500 mm 59.06 inch	hmax	2990 mm 117.72 inch
---	-----------------------	---	------------------------	---	-----------------------	---	----------------------	---	-----------------------	------	------------------------

Yarı Otomatik Semi Automatic	Şerit Ölçüsü Blade Dimension 54 x 1.6 x 9800 mm 2.126 x 0.062 x 385.8 inch	Şerit Motoru Blade Motor 5.5 kW - 1500/dk 7.3 hp - 1500 rpm	Sürücü Motor Feeding Motor Manuel Manual
Hidrolik Motor Hydraulic Pump Motor 3 kW - 1500 d/dk 4 hp - 1500 rpm	Soğutucu Motor Cooling Liquid Motor 0.12 kW - 3000 d/dk 0.16 hp - 3000 rpm	Voltaj Voltage 400 V 400 V	Maksimum Güç Maximum Power 8.71 kW 11.68 hp
Kesme Hızı Cutting Speed 15 m/dk - 49 ft/min 100 m/dk - 328 ft/min	Ağırlık Weight 3200 kg 7054 lbs	Talaş Fırçası M. Chip Brush M. 0.09 kW - 1500 d/dk 0.12 hp - 1500 rpm	Şerit Germe Sistemi Blade Tensioning System Hidrolik Hydraulic

90°	60°	45°	30°	0°	10°	15°	20°
Kesim Kapasitesi Cutting Capacity	Kesim Kapasitesi Cutting Capacity						
800 mm 31.50 inch	900 mm 35.43 inch						